maxell

ANTI-BACTERIAL AIR DEODORIZER **MXAP-COS20**

User Manual

Thank you very much for buying this product. Please read the user manual in advance and use the product safely.

Please take reference to the attached appendix if there is any.

User manual

For the English version of the instruction manual, please refer to the following URL: https://www.maxell.jp/en/consumer/ assets/pdf/mxap-cos20_manual_en.pdf



产品使用说明


中文版使用说明书请参考以下 URL:

https://www.maxell.jp/cn/consumer/assets/pdf/ mxap-cos20_manual_cn.pdf



Content of the package





The illustrations used in this user manual may differ from the actual product.

User Manual×1

■ Before Starting

About the user manual

- Contents of this user manual might be changed in the future without prior notice.
- For product improvement, change of appearance or specification might not be
- Except for personal use, any unauthorized copying of part or all parts of this manual is prohibited. Unauthorized republication is strictly prohibited.

Disclaimer


- Maxell shall not be responsible for any damage caused by fires, earthquakes, action of a third party, any accidents, intended or unintended misuse or other usage under abnormal conditions.
- All explicit and implicit contents not stated in the warranty card are not covered.
- Maxell shall not be responsible for failure due to any damage caused by usage other than described in the instruction manual
- Maxell shall not be responsible for any loss resulted from malfunction when connecting to interconnecting devices.
- This product is not being designed to be any equipment or device which could be concerned with human life such as medical device, nuclear device, astronomic device, transportation device etc., nor equipment or devices which requires high reliability. In case this product is used for the above equipment and/or systems, Maxell do not responsible for any injuries or fire accident cause by the failure of this product.

2 Safety Caution

Please strictly follow and use safely.

⚠ Warning	Warning refers to "Misuse which might lead to death or serious injury"."
⚠ Caution	Caution refers to "Misuse which might lead to injury' ² or damage' ³ ."

- *1: Serious injury refers to blindness or injuries, burnt, electric shock, bone fracture, poisoned or injury with after-effect, or resulted in hospitalization or long-term follow-up consultation
- *2: Injury refers to burnt, electric shock which do not result in hospitalization or long-term
- *3: Damages refers broad damages to houses or properties and domestic animals/pets.




/!\ Warning

- OPlease do not use in a place which cannot be ventilated.
- ●The recommended coverage is from 1~20 tatami (1.55~31m²). Please check the size of the room before use. If not used in recommended coverage, it may cause harm to humans and pets and damage to property.
- Please keep it out of reach of children to prevent electric shock or injury.
- When the product is used near small animals, please pay attention to their
- Material such as natural resin which are easy to oxidize could depreciate rapidly when they are kept too close to the product.
- Please stop using this product and ventilate the air, if you feel a change in physical condition such as a headache.
- Person who has asthma or related medical history, please consult your physician before use.
- Please use at least 30cm away from the air-outlet. (Please do not place objects within 30cm from the air-outlet.)
- Do not use in places where there is oily smoke, flammable gas, or metallic dust. It may cause fire or smoke

/!\ Warning

Abnormalities and Malfunction

Stop use and remove the adaptor from the socket immediately. If the main unit produces smoke, odor or noise, or water and foreign objects enters the main unit, stop use immediately and remove the



Main Unit / AC Adaptor

· Do not repair, disassemble or remodel This may cause fire, electric shock or injury.

This may cause electric shock or injury.



Do not contact with water

Do not pour water on the main unit or dip it into water. This may cause electric shock or fire.



Stop use after dropping and damage to the main unit

Continuation of use may cause electric shock, fire or injury. · Use and store properly at places out of children's reach



Do not put into fire

Do not put the main unit into fire or heat it.

This may cause overheat, fire or damage the main unit.



Do not put into refrigerators This may cause malfunction

Do not put into heating appliances such as microwave ovens or pressure cooker This may cause smoke or fire.

Do not use with wet hands

This may cause overheating, electric shock or malfunction.



Main Unit

- Do not use power input other than the exclusive AC adaptor This may cause overheating, electric shock or malfunction
- Do not put finger or foreign objects (such as metal) inside the air-outlet

This may cause electric shock or injury.

- Do not put drinkable water, cigarette ashes and flammable objects inside the main unit from the air-outlet or air-intake This may cause electric shock or fire.
- Do not cover the air-outlet or air-intake with your hands This may cause electric shock or malfunction.

AC Adaptor

· Do not use at a voltage other than the specified power supply voltage This may cause electric shock or fire

The power input of the AC adaptor of this product is AC100~240.

Do not use at loosen sockets

If it is loose between the AC adaptor and the socket, do not use it. This may cause fire or electric shock.


- Do not cover the AC adaptor with cloth or other objects Trapped heat may deform the case and cause fire or electric shock.
- Do not use broken AC adaptor

This may cause fire or electric shock.

∕!\ Warning

AC Adaptor

· Do not remove the AC plug from the AC adpator.



· Plug the AC adaptor down to its base family

Partially plugged AC adaptor may need to fire or electric shock.



Setting Up and Use

- Do not use in a place which cannot be ventilated
- · Do not use in area smaller than the recommended size
- Do not place any objects within 30cm from the air-outlet Using under wrong environment may harm humans or pets, or may lead to damage to properties.
- Do not use in location close to oily smoke, flammable gases or metallic dust It may cause fire or smoke
- Do not use in humid locations

Do not use in bathrooms, seashores, waterside or outdoor locations. Do not use in rooms with a highly functioning air humidifier. This may cause fire or electric shock.



Maintenance

- Please remove the adaptor during maintenance
- This may cause electric shock or fire

Do not use in places subject to water

This may cause fire or electric shock.

- Please clean the dirt on the AC adaptor regularly Regularly clean the waste or dirt. High humidity will cause poor insulation by dirt which may cause fire
- If there will be a long period of non-use, please remove the AC adaptor from socket



Setting Up and Use

- · Do not place in locations in direct sunlight or with abnormally high temperature This may cause fire or deterioration of the surface and parts of the main unit. Do not place inside a closed car, in locations in direct sunlight or near heating appliances such as stoves.
- Do not place in unstable locations
- Do not place on shaky platforms and slanted locations. Dropping and falling may cause malfunction.
- Do not place in highly humid or dusty locations
- Do not place in locations such as bathroom, air humidifier, kitchen and dusty locations. This may cause electric shock or fire.
- Do not place near television or radio
- If same socket is used for these types of products, this may cause disruption to sounds and images.
- When dew condensation happens on this poduct, do not turn on power input Sudden changes in temperature may cause dew of the parts inside. Do not turn on the power input and set the main unit aside.

Maintenance


Do not use chemicals


Do not use chemicals such as benzene, thinner or alcohol to wipe. Do not use penetrating oil. This may cause deterioration of the case and melting of parts.





3 Name of Parts

[Front]



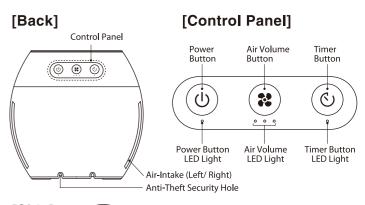





Attention

Although the AC plug can be removed due to its structure, please do not remove it as it may cause fire or electric shock.

[Installation conditions for use]

Please read the user manual carefully and use the product safely when using this product.

[Recommended Coverage]			
Air Volume	Low	Mid	High
Applicable Space	6 tatami (1.55~9.3m ^{2*1})	6~14 tatami (9.3~21.7m ^{2*1})	12~20 tatami (18.6~31m ^{2*1})
Air Volume LED Light	***	***	**

- ●The recommended coverage shown above is based on our test results, the space concentration of ozone is set as 0.05 ppm or less.(The standard of the Japan Basic Environmental Law of ozone concentration is 0.06ppm).
- Please follow the recommended coverage while using the main unit.
- Please do not use in a place which cannot be ventilated.
- ●The above recommended coverage is only for one main unit. Do not use it as a guide
- Please use at least 30cm away from the air-outlet. (Please do not place objects within 30cm from the air-outlet.)
- Ozone may smell and it is normal. In rare cases, you may feel uncomfortable such as headache due to individual differences even the ozone concentration is below the environmental standard 0.06 ppm. In that case, stop using immediately and ventilate. (See Table 1 for ozone concentration and its effect on the human body)
- For other precautions, please read this user manual thoroughly.

Table1

Ozone Concentration(ppm)	Effect
0.01	Sensitive people could feel the smell of ozone
0.02	Feel the smell of ozone (will get used to it)
0.06	Environmental standard concentration of photochemical oxidant (Ministry of the Environment Government of Japan)
0.1	Feels strong ozone odor, irritates nose and throat
	Tolerable concentrations in the working environment (Japan Society for Occupational Health)

* Refer to Japan Ozone Association Ozone Handbook * 1 : Based on internal test results

The result is confirmed under the condition of ventilation rate (0.5 times / hour) in the living room of the house conforming to the Building Standards Law of Japan. (0.5 times a hour means that 1/2 of air in the room is replaced in one hour.) The effect of use depends on the using environment such as temperature and humidity, using time, and using space.

4 How to use

[Installation]

The recommended room coverages for this unit is from 1~20 tatami


(1.55~31m^{2*2}).

Please check the size of the room you are using. Do not use for rooms other than these recommended coverage guidelines.

※2: Based on the results of internal company tests. Results may vary depending on the surroundings and the duration of use.

[Connecting to Power]


1. Connect the plug of the AC adaptor to the AC Adaptor Jack on the bottom. Pass the cord through the cord groove on the bottom. The main unit will be unstable and fall easily if you do not pass the cord through the cord groove.



[Operating]

When you press each button on the operation panel, you will hear a "beep" sound.

1. When you press and hold the power button, the power button LED, air volume LED, and timer LED all light up, the power lamp also lights up at the same time and the main unit starts to operate in low air volume

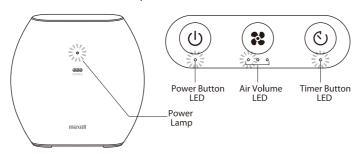

2. Change the air volume

The operating air volume changes each time when the air volume button is pressed. (Weak \rightarrow Medium \rightarrow Strong \rightarrow Weak \rightarrow Medium $\rightarrow \cdot \cdot \cdot \cdot \cdot$)

Air Volume	Low	Mid	High
Air Volume LED Light		*	

3. To stop the operation, press the power button. The power lamp and power button LED turn off and operation stops.

Do not use in a place which cannot be ventilated

[Other functions]

The timer function automatically stops operation after about 8 hours. By pressing the timer button, you can set the timer function ON / OFF.

Timer LED Lights	Timer Function	
	ON ^{**3}	Automatically stops operation after about 8 hours
	OFF	Operates continuously

%3: When the power is turned on by pressing the power button, the operation starts with the timer is turned on and the air volume is low. If the operation is stopped automatically by the power failure response function and the operation restarts automatically, the operation starts in the state before the Automatic dimming function

After about 5 minutes without any button operation during operation, the power lamp will automatically darken. When the button operation is performed again, the power lamp returns to the original brightness.

- Auto-stop function (When removing the rear panel) If you remove the rear panel during operation, operation will stop. The operation will restart *4 by reattaching the rear panel and long-pressing the
- Automatic stop function (when falling)

If the main unit falls during operation, operation will stop. Put the main unit back to normal position and long-pressing the power button can restart the operation.

¾4: Operation starts with the timer function ON and the low air volume.

■ Power failure response function

Even if the operation is stopped due to a power failure during operation, when the system recovers from the power failure, it automatically resumes the operation status before the power failure. (Example: Running with mid air volume \rightarrow Stop due to power failure \rightarrow Recovery from power failure \rightarrow (Automatically) Restart operation with mid air flow)

5 Maintenance

Maintenance once or twice a month is suggested.


Before maintenance

You must ensure that the unit is switched off before any maintenance is carried out. Unplug the AC adapter from the wall socket and disconnect the plug from the

Remove any dirt from the unit using a cloth dampened with water or detergent (neutral PH). Then wipe down gently with a dry cloth. Do not use any cleaner containing benzene, thinner or alcohol. Please also remove dust accumulated in the


[Filter]

Put your hands on the air-intake (left and right) of the rear panel and pull it towards you to remove the rear panel. Next, pull out the filter towards by grasping the handle of the filter. Use a vacuum cleaner or brush to remove the dust from the

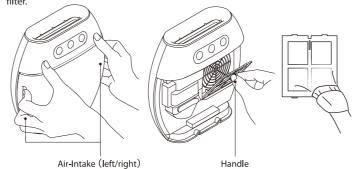

[Ozone Unit]

Open the cap and use a cotton swab to gently wipe the internal ozone unit.



After cleaning, replace the cap. Hold the handle of filter and insert the lower part of the filter first then insert the top of the filter and make sure there is no gap between with the main unit and the filter. Finally, attach the rear panel firmly.

Attention

- Be careful not to pinch your hands or fingers when attaching the rear panel.
- Attach the rear panel securely. If the rear panel is loose, the power will not turn
- Be careful not to damage the ozone unit.
- Be careful not to break the filter.
- Be careful not to close the cap or install the filter after cleaning.

6 Troubleshooting

If the following Solutions do not solve the problem, contact your dealer or our customer service center.

Phenomenon	Cause	Solution
Do not work (Power lamp, Button LED does not light up)		Use dedicated AC adaptor
	No power	Connect the AC adaptor plug securely
		Connect the AC adaptor to electrical outlet securely
	Rear panel is opened	Equip the Rear panel securely
	Main unit is not standing straight	Stand up the main unit straightly
Does not feel deodorant effect (no ozone smell)	The air-outlet or air-intake is blocked	Remove the block or object from the air-outlet or air-intake
	Dust filter or Ozone generator unit is dirty	Remove the dust following the instruction at " 5 Maintenance"
	Strong source of odor exists	Remove the source of the odor (if the source emits strong odor all the time, may not feel the deodorant effect)
Weak wind from the air-outlet	The air-outlet or air-intake is blocked	Remove the block or object from the air-outlet or air-intake
Foreign object entered the main unit		Stop using the main unit and contact to the store or agency customer service

7 Specification

[Main Unit]

: DC12V/1.2A Input Power

: W210 x D85 x H205mm Dimension

Weight : Approx. 1Kg

: 0~40°C (no water-drop condensation) Operation Temperature

Power consumption : Max. 4.5 W Ozone level : Max. 5mg/h

Recommended coverage : 1~20 tatami (1.55 ~ 31m²)

[AC Adaptor]

: AC100-240V 50/60Hz

: DC12V/1.2A Output Cable length : Approx.1.8m

% Effectiveness of Deodorant, Anti-bacterial, Virus Inactivation are described on the following site.

https://www.maxell.ip/consumer/mxap-cos20 01.html

(The effect may vary depends on the usage surrounding and the usage time.)

*Not all kinds of bacteria, viruses and odors are guaranteed to be effective.

**This product is not designed for dust collection.

■ When disposing of this product, follow the instructions (local regulations) of each local government.

8 Warranty and After service

■ Store Invoice & warranty slip Please read the warranty policy on this user manual thoroughly and keep the store invoice carefully. Warranty period is 1 year from purchase.



PA1788-01